Product Details

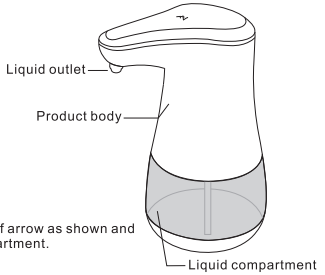

Turn the head of the device in the direction of arrow as shown and the bottom of the device has a battery compartment.

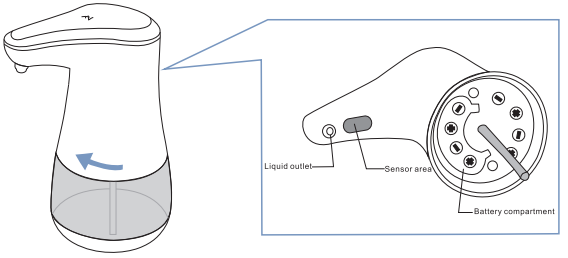

Using Method

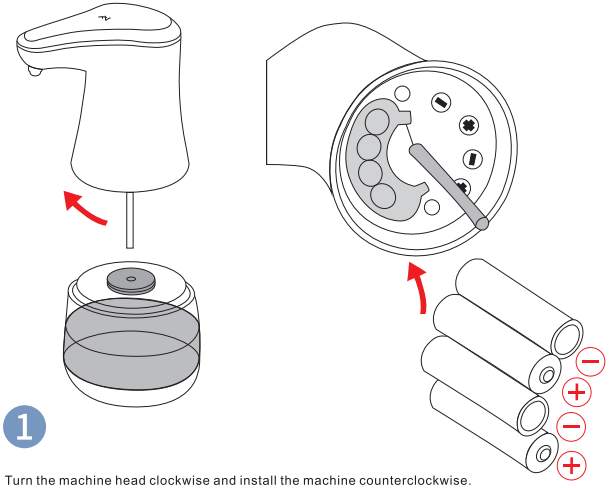

1

Turn the machine head clockwise and install the machine counterclockwise.
Open the battery compartment and install the positive and negative poles as shown.
Put in 4pcs Alkaline battery

2

Open the bottle and remove the lid if the silicone cap is on the side of the main body(on the silicone tube).

If the silicone cap is on the liquid bottle, remove it first, thenpour in the liquids. Be careful not to mix different liquids.

First, put the silicone cap on the liquid bottle, then put the product body on. When installing the device, hear "click." sound means installed.

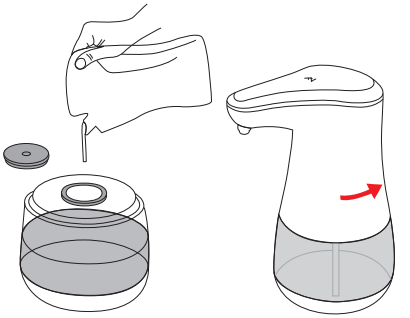

3

Touch the switch to turn on the device, the white light flashes.

Touch the switch to turn off the device, the red light lightens.

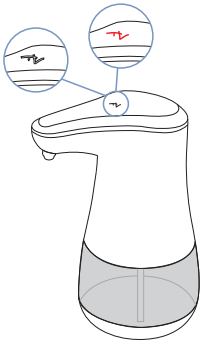

Attention:

Please use no. 5 alkaline battery. Avoid mixing old and new batteries or using rechargeable batteries.

When the battery is low, the machine LED indicator will turn red. Please replace the battery.

Please replace all batteries when replacing them. Do not mix new, old and different types of alkaline batteries.

When cleaning the machine, please empty the bottle of liquid, otherwise the liquid will enter the machine, causing damage to the machine. Please wipe the dirt with a clean soft cloth.

It is forbidden to wipe with high corrosive liquid(such as sulfuric acid, nitric acid, hydrochloric acid, etc.) or volatile liquid, which may easily cause deterioration, discoloration and damage on the machine.

FAQ

The device is not working properly

- Check if the battery has enough power.
- Is the battery positive and negative poles are in the right direction.
- Whether the red sensor area is shielded by foreign objects.

No liquid

- Whether used other thick liquids.